

## 导电性高分子铝固态电解电容器


**TP** series

- Super low ESR,high ripple current capability
- Endurance 2000hrs at 105°C
- ROHS Compliance
- suitable for switching power supply,DC/DC converter PDP/LCD TV and digital equipment

## ■SPECIFICATIONS

Item	Performance Characteristics	
Operating	-55°C~+105°C	
Rated Voltage Range	4~25V	
Capacitance Tolerance	±20% , 120Hz , 20°C	
Leakage Current(MAX)	I≤0.2CV or 280 uA ( After 2 minutes )	
Dissipation Factor(tan δ)	0.1 MAX	
ESR	Not more than the values in Table 1	
Characteristics of temperature impedance ratio	-55°C ( 100KHz low temperature )	Z / Z20°C≤1.25
	105°C ( 100KHz high temperature )	Z / Z20°C≤1.25
Load Life	After life test at conditions stated in the table below 2000hrs 105°C, the capacitors Shall meet the following requirement	
	Leskage Current	Not more than the specified value
	Capacitance Change	Within ±20% of initial value before test.
	Dissipation Factor	Not more than 150% of the specified value
	ESR	Not more than 150% of the specified value
Moisture resisnce (1000H, stored at 60°C, 90 to 95%R.H)	Leskage Current	Not more than the specified value
	Capacitance Change	Within ±20% of initial value before test.
	Dissipation Factor	Not more than 150% of the specified value
	ESR	Not more than 150% of the specified value
Surge Voltage Test	At normal temperature, charge at surge voltage for 30sec.and discharge via a 1KΩ protective resistor for 330 sec.repeat for 1000 cycles	
	Leskage Current	Not more than the specified value
	Capacitance Change	Within ±20% of initial value before test
	Dissipation Factor	Not more than 150% of the specified value
	ESR	Not more than 150% of the specified value
Others	JIS-C-5101-4	

## ■DIMENSIONS(mm)

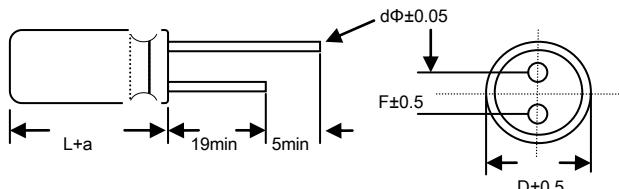

D	5	6.3	8
d	0.5	0.5	0.5
F	2.0	2.5	3.5
a	1.0		

## 导电性高分子铝固态电解电容器

TP series

## ■ Frequency Coefficent for Ripple Current

Frequency	120Hz≤F < 1KHz	1KHZ≤F < 10KHZ	10Khz≤F < 100Khz	100KHz≤F < 500KHz
Coefficent	0.05	0.3	0.7	1

WV ( v )	CAP ( uF )	ΦD ( mm )	L ( mm )	ESR ( mΩ ) max at 20°C 100KHz	Ripple current ( uA ) max at 105°C 100KHz	Dissipation Factor at 20°C 120Hz	Leakage current ( uA )max after 2 minutes
4	560	6.3	9	14	4750	10	448
	820	6.3	9	12	5580	10	656
	1200	6.3	9	12	5580	10	960
6.3	220	5	7	18	3100	10	280
	270	5	7	17	3300	10	340
	330	5	7	17	3300	10	415
		6.3	7	15	3900	10	415
	390	5	9	15	3500	10	491
	470	6.3	7	15	3900	10	592
	560	6.3	7	15	4250	10	705
		6.3	9	15	4500	10	705
	680	6.3	9	15	4500	10	856
	820	6.3	9	12	4500	10	1033
	1000	8	11	12	5500	10	1260
	1200	8	11	12	5500	10	1512
	1500	8	11	12	5500	10	1890
10	270	6.3	9	12	4400	10	540
	470	6.3	9	12	4400	10	940
		8	9	10	5440	10	940
	560	8	11	10	5500	10	1120
	1000	8	11	10	5500	10	2000
16	180	6.3	9	19	3400	10	576
	270	6.3	9	17	3900	10	864
		8	9	16	4050	10	864
	330	8	11	15	4500	10	1056
	470	8	11	15	4500	10	1505
25	47	8	9	25	3000	10	280
	68	8	9	22	3150	10	340
	100	8	11	20	3650	10	500
	220	8	11	35	3100	10	1100